





# Husky Intelligent i8



Water Outlet		Outdoor air wet bulb temperature °C											
Temperature °C		-20	-15	-10	-5	0	2	6	10	15	18	20	25
30	Capacity	3.81	4.43	5.15	5.99	6.97	7.3	8.11	8.92	9.81	10.5	11.03	12.13
	Power Input	1.41	1.46	1.51	1.57	1.62	1.65	1.68	1.73	1.78	1.81	1.87	1.95
	COP	2.7	3.03	3.4	3.82	4.29	4.43	4.82	5.16	5.52	5.8	5.91	6.21
35	Capacity	3.67	4.27	4.96	5.77	6.71	6.98	7.8	8.58	9.44	10.1	10.61	11.67
	Power Input	1.47	1.52	1.57	1.63	1.68	1.65	1.7	1.76	1.81	1.85	1.9	1.99
	COP	2.5	2.81	3.16	3.55	3.99	4.22	4.59	4.87	5.21	5.47	5.57	5.85
40	Capacity	3.59	4.18	4.86	5.65	6.57	6.88	7.64	8.4	9.24	9.89	10.38	11.42
	Power Input	1.55	1.61	1.66	1.72	1.79	1.81	1.85	1.9	1.95	1.99	2.05	2.15
	COP	2.31	2.6	2.92	3.28	3.68	3.8	4.13	4.42	4.73	4.97	5.06	5.32
45	Capacity	3.48	4.05	4.71	5.48	6.37	6.67	7.41	8.15	8.97	9.6	10.08	11.09
	Power Input	1.67	1.73	1.79	1.86	1.92	1.95	1.99	2.05	2.11	2.15	2.21	2.32
	COP	2.08	2.34	2.63	2.95	3.31	3.42	3.72	3.98	4.26	4.47	4.56	4.78
50	Capacity		3.84	4.47	5.2	6.05	6.34	7.04	7.74	8.51	9.11	9.57	10.53
	Power Input		1.91	1.98	2.05	2.12	2.16	2.2	2.26	2.33	2.37	2.44	2.56
	COP		2.01	2.26	2.54	2.85	2.94	3.2	3.42	3.66	3.84	3.92	4.11
55	Capacity			4.26	4.95	5.75	6.02	6.69	7.36	8.1	8.67	9.1	10.01
	Power Input			2.2	2.27	2.35	2.38	2.43	2.5	2.57	2.62	2.7	2.83
	COP			1.94	2.18	2.45	2.53	2.75	2.94	3.15	3.31	3.37	3.54

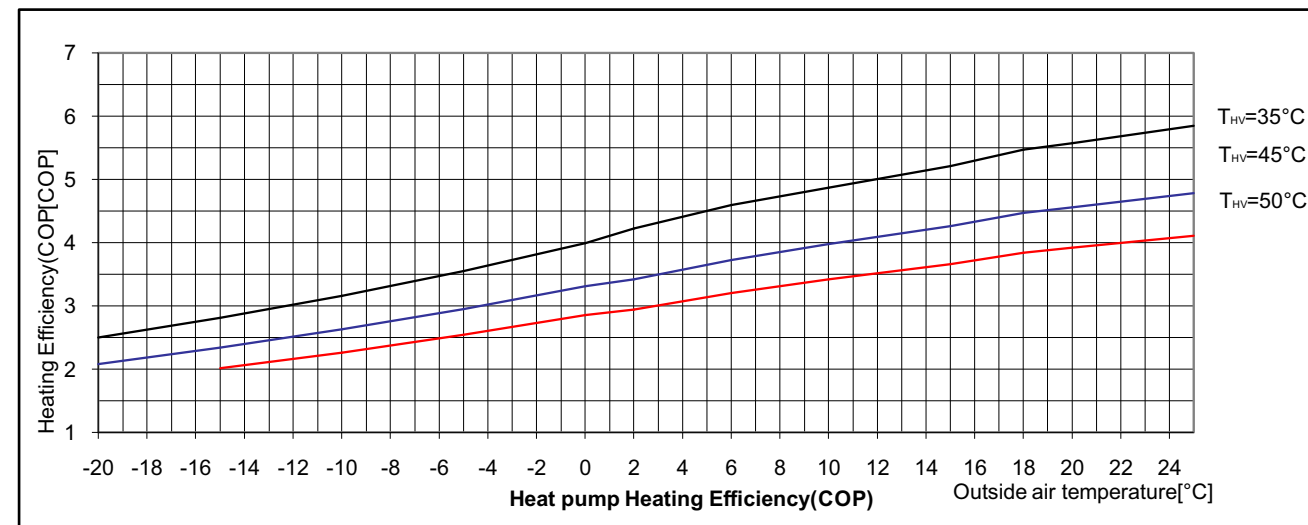

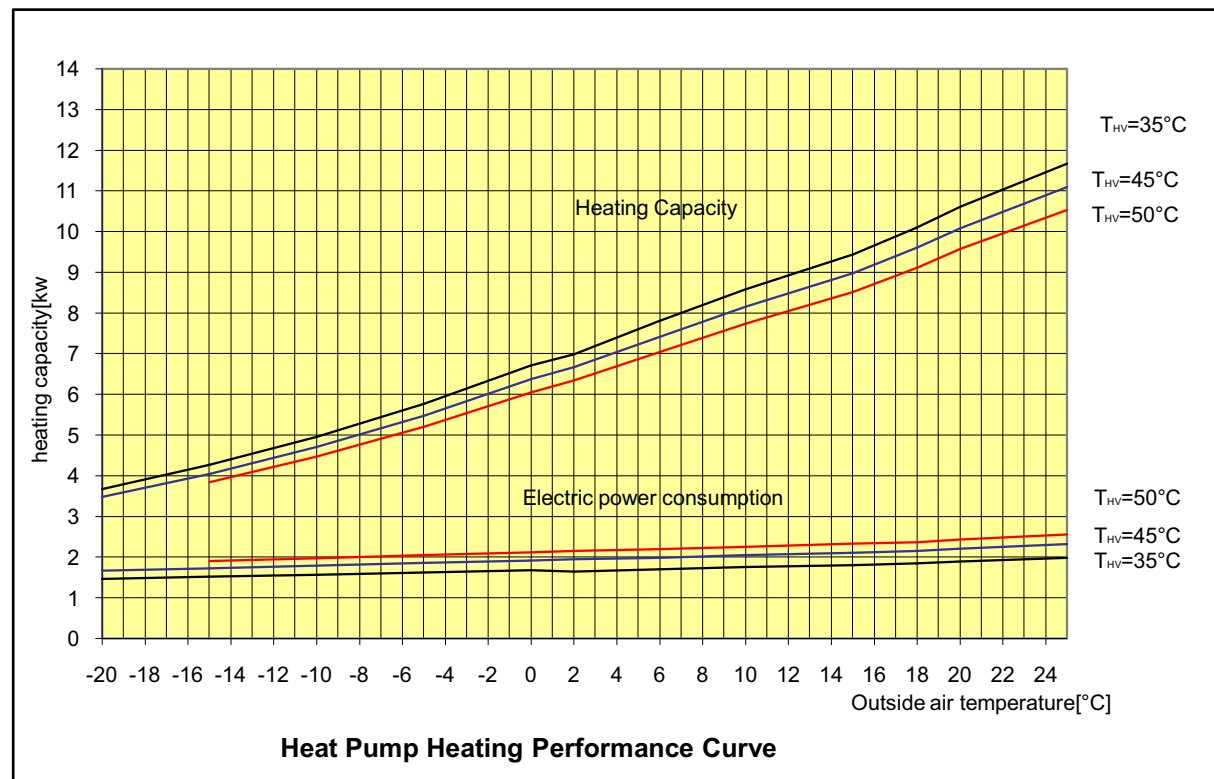

# Husky Intelligent i11

Water Outlet		Outdoor air wet bulb temperature °C											
Temperature °C		-20	-15	-10	-5	0	2	6	10	15	18	20	25
30	Capacity	5.19	6.03	7.01	8.15	9.48	9.92	11.02	12.12	13.33	14.26	14.97	16.47
	Power Input	2.09	2.16	2.24	2.32	2.39	2.43	2.48	2.55	2.62	2.67	2.75	2.88
	COP	2.48	2.79	3.13	3.52	3.96	4.09	4.45	4.76	5.09	5.34	5.45	5.71
35	Capacity	4.99	5.8	6.74	7.84	9.12	9.54	10.6	11.66	12.83	13.73	14.42	15.86
	Power Input	2.11	2.18	2.25	2.33	2.42	2.45	2.5	2.57	2.64	2.69	2.77	2.9
	COP	2.37	2.66	2.99	3.36	3.77	3.90	4.24	4.54	4.86	5.1	5.2	5.46
40	Capacity	4.83	5.62	6.54	7.6	8.84	9.25	10.28	11.31	12.44	13.31	13.98	15.38
	Power Input	2.32	2.4	2.49	2.58	2.66	2.7	2.76	2.83	2.91	2.97	3.06	3.21
	COP	2.08	2.34	2.63	2.95	3.32	3.43	3.73	3.99	4.27	4.48	4.57	4.79
45	Capacity	4.69	5.45	6.34	7.37	8.57	8.97	9.97	10.97	12.07	12.91	13.56	14.92
	Power Input	2.58	2.67	2.77	2.87	2.97	3	3.07	3.15	3.24	3.3	3.41	3.57
	COP	1.82	2.04	2.29	2.57	2.89	2.99	3.25	3.48	3.72	3.91	3.98	4.18
50	Capacity		5.18	6.02	7	8.14	8.52	9.47	10.42	11.46	12.26	12.87	14.16
	Power Input		2.94	3.04	3.15	3.27	3.3	3.38	3.47	3.57	3.64	3.75	3.92
	COP		1.76	1.98	2.22	2.49	2.58	2.8	3	3.21	3.37	3.43	3.61
55	Capacity			5.73	6.66	7.74	8.1	9	9.9	10.89	11.65	12.23	13.45
	Power Input			3.39	3.51	3.62	3.65	3.73	3.84	3.95	4.02	4.15	4.34
	COP			1.69	1.9	2.14	2.22	2.41	2.58	2.76	2.9	2.95	3.1

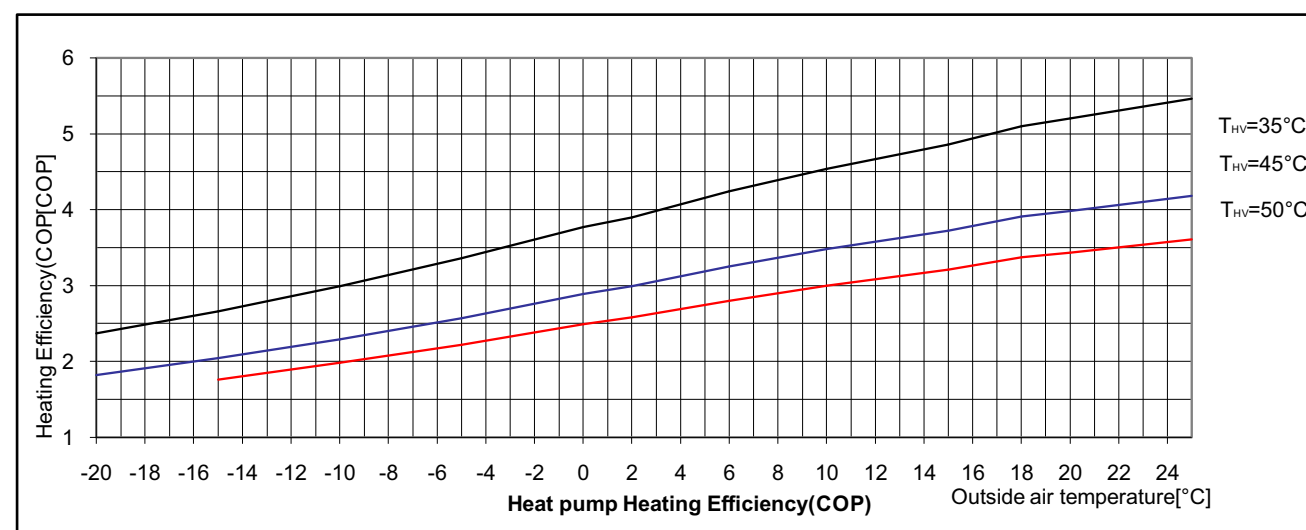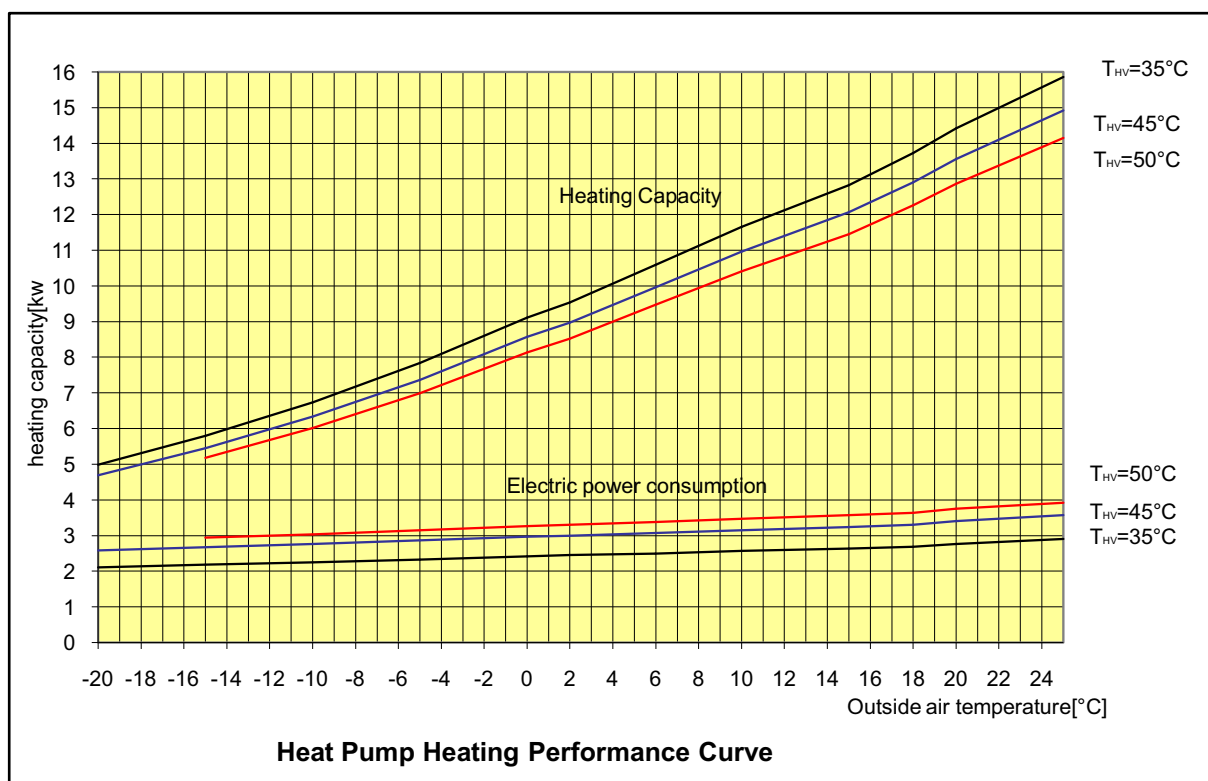



# Husky Intelligent i16

Water Outlet		Outdoor air wet bulb temperature °C											
Temperature °C		-20	-15	-10	-5	0	2	6	10	15	18	20	25
30	Capacity	7.59	8.82	10.25	11.92	13.86	14.51	16.12	17.73	19.5	20.87	21.91	24.1
	Power Input	2.92	3.02	3.13	3.24	3.35	3.39	3.47	3.56	3.66	3.73	3.84	4.02
	COP	2.6	2.92	3.28	3.68	4.14	4.28	4.65	4.98	5.33	5.6	5.7	5.99
35	Capacity	7.29	8.48	9.86	11.46	13.33	13.95	15.5	17.05	18.76	20.07	21.07	23.18
	Power Input	2.95	3.05	3.16	3.26	3.38	3.42	3.5	3.6	3.7	3.77	3.89	4.07
	COP	2.47	2.78	3.12	3.51	3.94	4.08	4.43	4.74	5.07	5.32	5.42	5.69
40	Capacity	7.15	8.31	9.66	11.23	13.06	13.67	15.19	16.71	18.38	19.67	20.65	22.72
	Power Input	3.21	3.32	3.44	3.55	3.68	3.72	3.81	3.91	4.02	4.1	4.22	4.42
	COP	2.23	2.5	2.81	3.16	3.55	3.67	3.99	4.27	4.57	4.8	4.89	5.14
45	Capacity	6.93	8.06	9.37	10.9	12.67	13.26	14.73	16.2	17.82	19.07	20.02	22.02
	Power Input	3.45	3.57	3.69	3.82	3.96	4.02	4.1	4.22	4.34	4.41	4.55	4.77
	COP	2.01	2.26	2.54	2.85	3.2	3.3	3.59	3.84	4.11	4.32	4.4	4.62
50	Capacity		7.65	8.9	10.35	12.03	12.59	13.99	15.39	16.93	18.12	19.03	20.93
	Power Input		3.94	4.08	4.22	4.37	4.43	4.53	4.65	4.78	4.87	5.02	5.26
	COP		1.94	2.18	2.45	2.75	2.84	3.09	3.31	3.54	3.72	3.79	3.98
55	Capacity			8.45	9.83	11.43	11.96	13.29	14.62	16.08	17.21	18.07	19.88
	Power Input			4.49	4.66	4.82	4.88	5	5.13	5.27	5.38	5.54	5.81
	COP			1.88	2.11	2.37	2.45	2.66	2.85	3.05	3.2	3.26	3.42

